



MAIN PARAMETERS

Dimensions	947 x 202 x 228 cm
Safety area	735 x 884 cm
Safety area (m ²)	60,3 m ²
Free fall height (HIC)	135 cm
Recommended age group	3-14 years
Recommended number of users	8 person
Complies with Standards	EN 1176-1 EN 1176-2

FUNCTIONS

Swing seat	4 pcs
Nest swing	1 pcs



SWINGING



INTERACTION





INCLUSIVE



COOPERATION


TECHNICAL DATA SHEET
THREE-SECTION SWING - K
 BLFJ120B

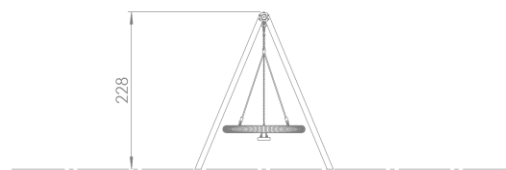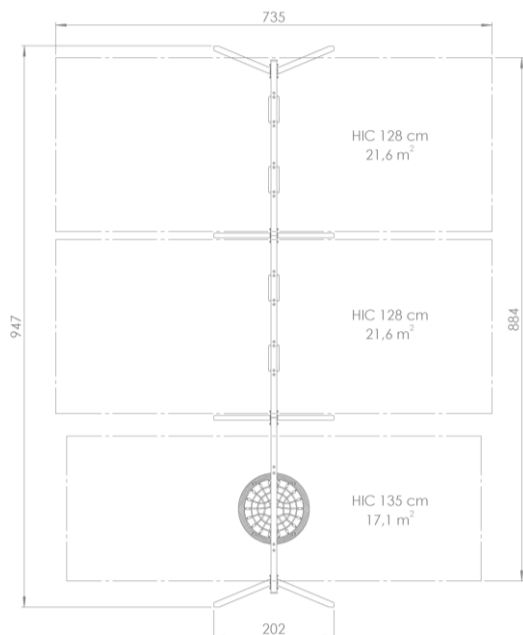

SAFETY AREA

HIC 135 cm	17,1 m ²
HIC 128 cm	43,2 m ²
HIC in Total	60,3 m²

MATERIAL USAGE



Construction: 100 x 100 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



End Cap: 15 mm, contour milled, UV resistant HDPE plate.



Swing seat: TPE rubber baby seat / swing seat, aluminium insert plate.



Fasteners, chains: stainless steel.



Nest swing: D120 x 12 cm, D18 mm steel ring wound with shock absorbing foam, D16 mm armed braided PP rope, mesh design seat.